
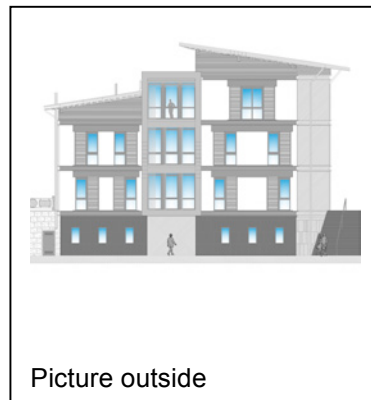


Evaluation ENERBUILD-Tool – Building in planning phase

Vigo Rendena Parsonage

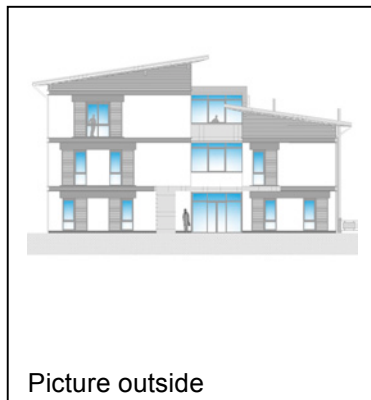

1 Basic information about the building

Name of the building	Parsonage
Address of the building	via IV Novembre, 38080 Vigo Rendena (Tn) Italy
Owner/investor	Municipality of Vigo Rendena
Year of construction	2009-2010
Building type	Lightweight construction
Building method	Platform frame
Number of buildings	1
Number of levels above earth	2.5
Number of levels underground	1
Kind of the public use	Public use: parsonage and assembly hall.
Effective area for public use in m ² (net)	207.10 m ²
Additional private uses	-
Effective area for private use in m ² (net)	207.10 m ²
Total effective area in m ²	Natural gas
Source of energy for heating	Central-heating boiler powered by natural gas
Heating system	Hot water generator powered by biomass (wood chips and pellets), heat pump with puffer store.
Water heating system	In progress

2 Execution of the building evaluation with the ENERBUILD tool

Responsible Organisation: University of Trento – Department of Civil and Environmental Engineering - Italy


Contact person: Prof. Antonio Frattari

Telephone: +390461282668

Email: antonio.frattari@unitn.it

3 Results

Nr.		Title	Must criteria (M)	max. points	evaluated points
A		Quality of location and facilities		max. 100	50
A	1	Access to public transport network		50	0
A	2	Ecological quality of site		50	50
B		Process and planning quality		max. 200	135
B	1	Decision making and determination of goals		25	25
B	2	Formulation of verifiable objectives for energetic and ecological measures	M	20	20
B	3	Standardized calculation of the economic efficiency	M	40	40
B	4	Product-management - Use of low-emission products		60	50
B	5	Planning support for energetic optimization		60	0
B	6	Information for users		25	0
C		Energy & Utilities (Passive house)		max. 350	285
C	1	Specific heating demand (PHPP)	M	100	64
C	2	Specific cooling demand (PHPP)	M	100	46
C	3	Primary energy demand (PHPP)	M	125	125
C	4	CO ₂ -emissions (PHPP)		50	50
D		Health and Comfort		max. 250	50
D	1	Thermal comfort in summer		150	0
D	2	Ventilation - non energetic aspects		50	0
D	3	Daylight optimized (+ lightening optimized)		50	50
E		Building materials and construction		max. 200	75
E	1	OI ₃ _{TGH-ic} ecological index of the thermal building envelope (respectively OI ₃ of the total mass of the building)		200	75
Sum				max. 1000	595

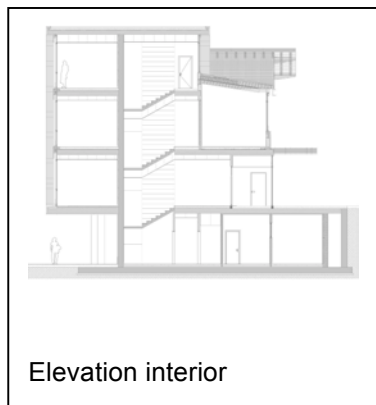

Elevation interior



Ground floor plan



First floor plan

4 Conclusions from the building evaluation with the ENERBUILD-Tool

a) Generally

The building scored 645 points – well representative of its high level of environmental sustainability even if an higher score with ENERBUILD tool could be expected.

Since the building analyzed is relatively small, this evaluation process was feasible and practicable. The great majority of points are lost in part D “Health and comfort”. In particular:

1. For what concerns the criterion “optimized Daylight”, LEED do not consider acoustic criteria, so no calculus is available at the moment on this issue.
2. Regarding “Thermal comfort in summer”, even if T upper limit has been raised to 27°C (in order to consider higher summer temperature in Italian situation), the upper allowed temperature is overshoot for the 16.4 % of time. In Mediterranean countries it is quite difficult that upper temperature is overshoot less than 5% of time in summer, so this limit should be raised even taking into account only the effective period of usage.

Considering “Daylight optimized”, Leed certification considers only regularly occupied spaces, and it requires daylight factor up to a maximum percentage of 2% in 75% of these spaces, while according to ENERBUILD certification this factor has to be as possible equal to 5%, and superior to 2%, calculated on entire area, that is effectively a too severe request. Being the Daylight factor 4,98%, we considered fulfilled the criterion.

b) About the planning process

The building was designed to obtain a Leed NC 2.2 Silver certification, corresponding to a range of 37- 43 points.

For what concerns the planning process, it has been done using LEED as reference and not ENERBUILD tool, that has been applied in a second moment and so it can be considered more an evaluation tool than a planning tool. However, the following considerations about ENERBUILD-Tool can be done:

1. Point A1 is clear and easy to be faced.
2. Point A2 is well defined and the proposed index is easy to be used.
3. Points B1 and B2 are very detailed and well done. All the most important aspects of planning phase are taken into consideration. Each point has a proper reference with LEED tool (see even following detailed considerations).
4. Point B3 has been quite difficult to be done. LCC is a procedure more and more important in the planning phase (together with LCA) and it is important that in ENERBUILD it has a good relevance, but the ISO Standard and the Austrian standard has been difficult to be applied. For this reason, a simplified method has been followed considering the classical value analysis theory.
5. Point B4 is very important concerning human health in indoor spaces. ENERBUILD is quite complete even if the definition of the percentage of structures with ecological declaration is not clear. It could be easier to have reference to European standards and not to local ones. Even a list of most common building components could be useful.

6. Point B5 is of course an important issue and it has clear reference, point by point, with LEED protocol. It is sufficiently clear and not difficult to be faced.
 7. Point B6 is clear and very important. Unfortunately, not all the energy and environmental tools consider this aspect.
 8. Point C1 to C4. This is the most problematic section of the tool. In fact, we agree that, in order to have comparable results, the same energy calculation tool should be used. However, PHPP is a good tool only if a passive building has been designed, and the pilot building considered is not a passive one. Moreover, cooling demand is often overestimated and low points are given. It is our opinion that other software should be used, even national ones, taking into account that all the partners should agree on some “fixed points” so that final results of the energy calculation could be compared. For example, it is important to consider international standards. But the choice of the energy calculation tool should be free.
 9. Point D1: refer to previous comment.
 10. Point D2: in this case, it should be better to leave the partner free to consider national legislation and not fixed values. Also the acoustic index used should refer to international standards. In the case of the pilot building considered, calculation were not made so it is quite impossible to calculate the correct indexes.
 11. Point D3: the point is simple and using the EN standard it is easy to calculate. Anyway, the 5% of DF required seems to be too high. In our opinion, following LEED specifications, a daylight factor up to a maximum percentage of 2% in 75% of frequently used spaces should be sufficient.
- Point E1: the procedure for calculating the OI3 index is quite simple and it is an important aspects of building construction.

c) About the building itself

Vigo Rendena parsonage is an innovative project of prefabricated wood building, cutting edge in terms of environmental sustainability and of use of renewable energy. In fact, characteristic of this building is the use of traditional building materials – as stone, wood, plaster – and the use of optimization systems of energy performance.

In particular, its specific construction techniques are:

- concrete structure just in basement, while in remaining floors the structure is wooden;
- use of renewable energies such as photovoltaic and heating boiler with wood chips and pellets;
- high internal environmental comfort provided by a forced-air ventilation with heat recovery;
- use of regional materials;
- automatic checks for a reduction in power consumption.

d) About the evaluation process

In the case of small buildings like this, evaluation process is feasible and practicable.

The most problematic aspects of the research has been those related to the collection of all necessary documents and information – that sometimes must be too detailed –. For this reason, we chose to perform ENERBUILD evaluation process using data provided by Leed certification protocol. So, we had to verify where these two systems overlap and which Leed credits correspond (even partly) to ENERBUILD criteria and which have been tried for the considered building. However, if there is no correspondence (as in the case of credit D2, and, partly, credit B1) or a Leed credit has not been tried, we considered the correspondent ENERBUILD criterion not satisfied. Section C and criteria B3 and E1 – which have no Leed equivalent – are instead calculated separately, according to the instructions of the manual.

Here follows the comparison between ENERBUILD criteria and Leed credits tried for this building.

A Quality of location and facilities

A1 Access to public transport network

Leed evaluation process requires easy access to public transportation through SS Credit 4.1 "Alternative Transportation: Public Transportation Access". To get this criterion, Leed and ENERBUILD evaluations use very similar approaches, both requiring to place the project near an existing public bus or train stop. However, compared to Leed certification, ENERBUILD evaluation process also requires a transport minimum hourly frequency.

A2 Ecological quality of site

There is no direct correspondence between LEED credits and ENERBUILD A2 criterion. However, it is possible to calculate area's ecological index by Leed certification, and in particular through SS Credit 1 "Site Selection" and through SS Credit 2 "Density & Community Connectivity".

B Process and planning quality

B1 Decision making and determination of goals – B2 Formulation of verifiable objectives for energetic and ecological measures

Decision making is defined by Leed evaluation process through an initial diagram and through two reports ("Basis Of Design", BOD, and "Owner's Project Requirements", OPR, defined by EA Prerequisite 1, "Fundamental Commissioning of the Building") that contain the objectives to be pursued. Checklist is also a Leed tool which allows to evaluate the project team's choices and to get B1 and B2 ENERBUILD Criteria.

In particular, for credit B1 assessment important criteria are SSPr1, SSPr2, SSC2, SSC4, SSC5 into the SS Section "Sustainable Sites", criteria EAPr2, EAC1 into the EA Section "Energy and Atmosphere", criteria MR C4, MRC 5, MRC6 into the MR Section "Materials and resources" and IEQ Criterion 4 into the EQ Section "Indoor Environmental Quality".

B2 credit is met by two Leed reports – BOD and OPR – defined respectively by the owner and by the design team. These tools are a necessary prerequisite for Leed certification and so B2 criterion is always get.

B3 Standardized calculation of the economic efficiency

Standardized calculation of the economic efficiency (LCC) is not considered by Leed certification and so it was calculated separately.

B4 Product management – Use of low-emission products

Product management is defined into the MR Section "Materials and Resources" and into the EQ Section "Indoor Environmental Quality" through different criteria. In particular, Leed evaluation process requires to use materials with recycled content, rapidly renewable and regional as defined, respectively, by MR Criterion 4, C5 and C6.

However, Leed evaluation process requires full documentation of all materials used but it requires Low-Emitting Materials only for building's interior and in particular, for adhesives and sealants, paints, and coating, carpet systems composite wood, agrifiber products (and according to the manual "Leed for School", furniture) as required by Credits 4.1, C4.2, C4.3, C4.4 into the EQ Section.

Therefore, although the correlation between Leed evaluation and credit B4 is not direct, it is possible to compare these two protocols and ENERBUILD criterion B4 is get if all Leed criteria have been tried.

B5 Planning support for energetic optimization

- B5 criterion requires to satisfy the following conditions (each associated with 5 points):
- design by specifying destination, size, frequency and intensity of use of the rooms, and their internal temperatures. This criterion is quite similar to Leed Credit EA1, because building energy simulation requires the same information;
 - design of air flow room according to hygiene requirements, as required into the EQ Section, "Indoor Environmental Quality", and in particular by EQPr1 (that requires to establish minimum indoor air quality);
 - identification of internal heat sources, condition necessary to develop building energy simulation and so condition already required by Leed Credit EA1;
 - calculation of thermal bridges by means of a default value of 0.03 W / (m2 K) and detailed verification of thermal bridges. There is no correspondence to Leed certification system;
 - description of energy parameters in the contract, as required by Leed EA Pr1;
 - verification of energy aspects of the tenders with the requirements of the contract, condition satisfied because it gets EA Prerequisite 1;
 - visits to the site to support local management about energy issues, required also by Credit EA C5;
 - provide to conduct the Blower Door test, that is an option required by Leed certification just in case of residential buildings, through EQ Prerequisite 2 (Option 3);
 - measure of ventilation system, as required by Leed evaluation with EA Credit 1;
 - hydraulic balancing of the heating, as required by Leed EA Credit 1;

- update of the calculations of energy requirements at the end of the construction and conduct a blower door test as final control. This criterion get Leed EA Credit 1;
- verification of energy requirements at the end of the work, as required by Leed EA Credit 5 "Measuring and verification".

B6 Information for users

Leed evaluation process requires to develop an use and operating manual just if you want to get the EA Credit 3 "Enhanced Commissioning". So, its development – very rare – depends on project team's choice, on building's complexity and on its destination.

C Energy & Utilities (Passive house)

C1 Specific heating demand (PHPP) – C2 Specific cooling demand (PHPP) – C3 Primary energy demand (PHPP) – C4 CO₂-emissions (PHPP)

Section C on the energy requirements (C1, C2, C3) can not be compared directly with EA Leed section "Energy and Atmosphere". In fact, ENERBUILD certification system requires an analysis developed by using Phpp software, whereas Leed evaluation process just requires (EA C1) to observe the minimum prescriptive measures. Also, if you want to obtain the maximum score, Leed requires to develop a dynamic simulation (EA C1, Option 2) that involves comparison of the building with a basic model defined by prescriptive measures (ASHRAE 90.1.2007 norm, Appendix G).

D Health and Comfort

D1 Thermal comfort in summer

Although into the EQ Leed section credits EQ C7.2 and EQ C7.1 define all the requirements for summer thermal comfort, it is necessary to use Phpp software to calculate value h_{θ} (percentage overshoot the maximum allowable temperature in summer) required by ENERBUILD certification system. Therefore, D1 ENERBUILD criterion doesn't find a match with Leed certification.

D2 Ventilation – non energetic aspects

Leed evaluation process defines the requirements for sound insulation just when the building is a school. Again, however, there is no correspondence to ENERBUILD evaluation process: Leed certification requires to achieve in classrooms a background noise up to a maximum level of 45 dBA, equivalent to standards required by ANSI S12.60/2002 (EQ Pr3); instead, ENERBUILD requires not only a background up to a maximum level of 30 dBA, but also that sound pressure level (not exceeding 20 dB) is evaluated with the weighting curve "C". In particular, this second aspect is not considered by Leed evaluation process and so these two evaluation processes are not comparable.

D3 Daylight optimized (+ lightening optimized)

D3 criterion is similar to Leed EQ Credit 8.1 "Daylight and views". However, Leed certification considers only regularly occupied spaces, and it requires daylight factor up to a maximum percentage of 2% in 75% of these spaces, while according to ENERBUILD certification this factor has to be as possible equal to 5%, and superior to 2%, calculated on entire area.

E Building materials and construction

E1 OI3TGH-Ic ecological index of the thermal building envelope

Although Leed evaluation process rewards the use of ecological materials (MR C4, MR C5 and MR C6), Leed doesn't require the calculation of ecological index of thermal building envelope. So, ENERBUILD E1 criterion doesn't find a match with Leed certification system.

5 Suggestions for improvement of the ENERBUILD-Tool

- Mandatory criteria shouldn't have score;
- Criterion B3: life cycle cost analysis is a mandatory criterion, but in practice LCC are rarely calculated. moreover, prescriptions and assumptions for profitability calculation are not clear and ISO 15686-5 is not sufficient;

- Section C: some PHPP layers require information too detailed and very difficult to collect for already designed and built constructions, especially if not passive buildings;
- Criterion D3: only regularly occupied spaces and not entire area should be considered in order to calculate the average daylight factor.

5 Annex A: Detailed evaluation of criteria

A Quality of location and facilities

A1 Access to public transport network

A1 criterion score was zero since the building is not adequately served by public transport (not verified hourly transport).

Criteria	Max points	Obtained points
A1 Criterion	50	0

A2 Ecological quality of site

The site function was not changed: the pre-existing parsonage was demolished and the new building was built right on the area previously occupied, which has then a low ecological value (a1- area with zero ecological value). So, it was awarded the highest score for the A2 criterion, of 50 points.

Criteria	Max points	Obtained points
A2 Criterion	50	50

B Process and planning quality

B1 Decision making and determination of goals

Decision-making documentation coincides with the checklist developed in pre-design phase.

In this case, variants were evaluated by all ENERBUILD accounts, except the term relating variant 0 which was not evaluated (Leed certification do not requires it)It has been partly allowed the use of ecological materials as regional materials – having been tried the Leed Credit MR5 –.

Criteria	Max points	Obtained points
Exists a documentation of the decision making process?	10	10
Have been variants considered and evaluated?	5	5
Has been 0-variant considered?	5	0
Does a documentation of the evaluation scheme of the variants exist?	4	4
Does it contain:		
Urbanism	2	2
Access to public transport	2	2
Landscape impact - soil quality	2	0
Energy efficiency	2	2
Ecological use of materials	2	0
Sum	25	25

B2 Formulation of verifiable objectives for energetic and ecological measures

Reports BOD and OPR (EA Prerequisite 1) define the characteristics of the project, including energetic and environmental measures. In particular, objectives of this project are:

- use of renewable energies such as photovoltaic and heating boiler with wood chips and pellets;
- efficiency of the ventilation system;
- use of regional materials and products;

So, ENERBUILD criterion may be fulfilled in accordance with the goals contained in the two reports and in checklist required by Leed certification system.

Criteria	Max points	Obtained points
B2 Criterion	20	20

B3 Standardized calculation of the economic efficiency

The life cycle costs and the economic efficiency were not calculated in planning and Leed certification phases. However, since the criterion ENERBUILD is mandatory, the analysis has also been carried out: the building is constructed with good materials and so its life cycle costs are lower than those of reference model (OIB6) and the ENERBUILD criterion is fulfilled.

Criteria	Max points	Obtained points
B3 Criterion	40	40

B4 Product management-Use of low-emission products

The Leed credits tried for this building project are related to use of recycled, regional and rapidly renewable materials. 100% of the structure is declared but documentation of construction process is partial.

Criteria	Max points	Obtained points
Exists a documentation of the ecological optimization of the materials during the planning phases	10	10
The tender for all craftworks have been declared ecologically? Criteria like in baubook.		
100% of works	20	0
90% of works	15	0
70% of works	10	0
Were all products of all craftworks declared?		
100%	30	30
90%	20	-
70%	10	-
Does an ecological building supervision exist? Did the supervisor do regularly inspections on the building site?		
- Total construction process	20	-
- Partially construction process	10	10
Sum	60	50

B5 Planning support for energetic optimization

Credit EA5 was not tried and Blower Door test was not developed (Leed evaluation process doesn't require it).

ENERBUILD	Points	Leed credits	Obtained points
Design by specifying type, size, frequency and intensity of use of the rooms, and their internal temperatures	5	EAC1	5
Design of air flow to room according to hygiene requirements	5	EQPr1	5
Identification of internal heat source	5	EAC1	5
Calculation of thermal bridges by means of a default value of 0.03 W / (m2 K) and detailed verification of thermal bridges	5	-	-
Description of energy parameters in the contract	5	EAPr1	5
Verify of energy aspects of the tenders with the requirements of the contract	5	EAPr1	5

Visits to the site to support local management about energy issues	5	EAC5	0
Provide to conduct a Blower-Door Test	5	EQPr2	0
Measure of ventilation system	5	EAC1	5
Hydraulic balancing of the heating	5	EAC1	5
Update of the calculations of energy requirements at the end of the work and conduct a blower door test to control	5	-	-
Verification of energy requirements at the end of the work	5	EAC5	0

Criteria	Max points	Obtained points
B5 Criterion	60	35

B6 Information for users

A user manual does not exist for the building, since it has not been tried Leed credit EA c3 "Commissioning advanced".

Criteria	Max points	Obtained points
B6 Criterion	25	0

C Energy & Utilities (Passive house)

C1 Specific heating demand (PHPP)

Specific space heat demand: 21 kWh/m²a

Criteria	Max points	Obtained points
C1 Criterion	100	64

C2 Specific cooling demand (PHPP)

Specific cooling demand: 6 kWh/m²a

Criteria	Max points	Obtained points
C2 Criterion	100	46

C3 Primary energy demand (PHPP)

Specific primary energy demand: 38.4 kWh/m²a

Criteria	Max points	Obtained points
C3 Criterion	125	125

C4 CO₂-emissions (PHPP)

CO₂-emissions: 10.8 kg/m²a

Criteria	Max points	Obtained points
C4 Criterion	50	50

D Health and Comfort

D1 Thermal comfort in summer

PHPP software has calculated the value h_θ (overshoot the maximum allowable temperature in the summer) equal to 12.9, superior than 5% required by ENERBUILD certification system T upper limit set to 27°C)..

Criteria	Max points	Obtained points
----------	------------	-----------------

D1 Criterion	150	0
--------------	-----	---

D2 Ventilation – non energetic aspects

In this case, the two certification systems are not comparable and so, missing necessary data, D2 criterion score is zero.

Criteria	Max points	Obtained points
D2 Criterion	50	0

D3 Daylight optimized (+ lightening optimized)

The daylight factor was calculated with following formula from UNI EN 15193, 2008 for each room:

$$\bar{D} = \frac{A_g \cdot \theta \cdot \tau_{D65}}{A \cdot (1 - R^2)} \quad 4.98\%$$

Daylight factor result:

Criteria	Max points	Obtained points
D3 Criterion	50	50

E Building materials and construction

E1 OI3TGH-Ic ecological index of the thermal building envelope

When value $OI3_{TGH-WG-BGF Ref}$ takes values between 38 and 295, the points for the credit E1 assessment are calculated using the following formula:

$$\text{Points} = 2 \times (0,0007 \times OI3_{TGH-BGF}^2 - 0,623 \times OI3_{TGH-BGF} + 123)$$

If $OI3_{TGH-WG-BGF Ref} \leq 38$, are awarded 200 points, while if $OI3_{TGH-WG-BGF Ref} \geq 295$, are instead assigned 0 points. In this case:

$OI3_{TGH,BGF}$ result=170

Criteria	Max points	Obtained points
E1 Criterion	200	114